



MANITOU

MANITOU

LU-306



bis
24 m Höhe

4016

MRT 2550+

MANITOU



MANITOU

bis
24 m Höhe

LU
306

mös
Mössinger
tel. 043

Nederman

BRUNN & KRANSYSTEME



meyer-oltenbau.ch

40

MANITOU

LU 306

570

e



er Bedachungen
Zimmermann
HOLZBAU + SÄGEREI AG
8528 Herlisberg 6222 Gunzwil
Tel. 041 930 46 99 www.zg-holz.ch

leiser
MANITOU
Bobcat
Q-ANT

meyer-ofenbau.ch

Galliker Bedachungen
041 930 33 37 • 6222 Gunzwil
Bühnen, Flachdach, Passendbau, Spangler

MRT 2550+

MANITOU

Bobcat





MRT 2550+

PRIVILEGE

MRT 2550+





 **MANITOU**

ABC





MANITOU



NY 75125

7FFA

MANITOU



RMA_001_PR797-798 MRT2550+AG|1006
LOAD CHART

LMI VERSIONEN 109
SOFTWARE


MCC VERSIONEN 101
SOFTWARE

MCT VERSIONEN 115
SOFTWARE

TERAT VERSIONEN 107
SOFTWARE



<http://www.manitou.com>

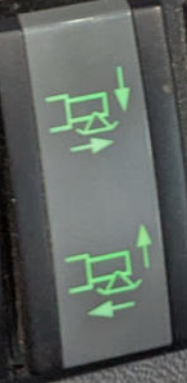



N° 725125

TFF

The main display features a central speedometer showing 0.0 km/h in gear N. To the left is a tachometer with a redline at 2100 rpm. To the right is a fuel gauge with markings for 1/4, 1/2, 3/4, and F. The display also shows a temperature of 16°C, a time of 8:55, and a battery level indicator labeled 'EMPTY'. The MANITOU logo is at the bottom. The screen is surrounded by a grid of icons for various functions like engine, transmission, and maintenance.

↑/+ ↓/- Home Esc ←

A row of physical buttons including a red (P) button, a green arrow button, a green dot button, a green double arrow button, and a green infinity button.



FORME A:
RMS TO:

0 3449
0 3471
3 56.6

N°193032

iser AG
chinen + Fahrzeuge
ggmatte 4
0 Reiden

Gesamtgewicht: 23900 kg

Achslast vorne: 10500 kg

l. Achslast hinten: 12000 kg

K-Wert: 0.3m-1



Designation

MRT 2550 +

Series

PRIVILEGE ST4 S2

Year of manufacture

01/2020

Model year

2020

Serial Number / Product Identification Number

>MAN00000000777430<

Unladen mass

18900 kg

Power

115 kW

Authorized gross vehicle weight

/ kg

Rated capacity

4999 kg

Max vertical force (on trailer hook)

/ daN

Drag strain

9000 daN



MANITOU ITALIA S.r.l. - 41013 Castelfranco E. (MO) - ITALY

// 123662

12/5.4

52561780







1691

SSR 22.5

4444

PKB19130875

